

PRODUCT DATASHEET

KG200 Continuous Hinge

The aluminium continuous geared hinge runs the full length of the door and provides maximum strength, security and safety. It is fitted with a specially formed metal cap to resist ligature attachment and is supplied with security pin torx fixings.



Terms and conditions:

To see our full terms and conditions, please visit:
kingswaygroupglobal.com/en-au/terms

Your Partner in Patient Safety

Installation Description

The KG200 Continuous Hinge is only supplied as part of a Kingsway Group Complete Door System where all components are fitted and tested in the production process.

Operation and Maintenance

Operation

The continuous hinge operates by an interlocking extruded cog mechanism that provides a high strength and smooth motion for doors with heavy usage.

Maintenance

Periodic checks should be made to ensure the hinge or the fixings have not been tampered with and that the fixings remain tight.

Cleaning

Cleaning of the hinges should be with a damp cloth. Cleaning agents should be avoided.

Warranty

1 Year Manufacturer's Defect Warranty*


*For faulty manufacture and not for damage

Specification

KG200 Continuous Hinge

PRODUCT DIAGRAM

KG200 Continuous Hinge

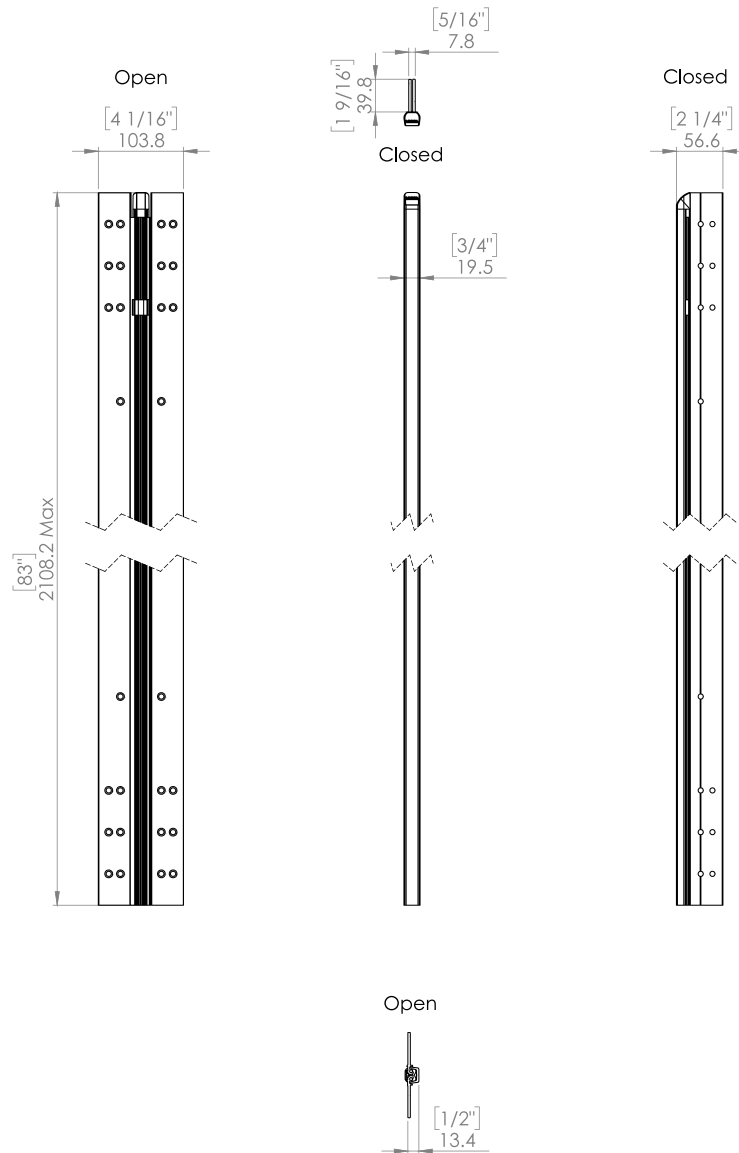

Terms and conditions:

To see our full terms and conditions, please visit: kingswaygroupglobal.com/en-au/terms