Kingsway Group

product datasheet KG111 Continuous Hinge

The KG111 stainless steel continuous hinge runs the full length of the door for enhanced strength and abuseresistance in challenging environments, most often used as part of the Kingsway SECLUSION Door System.



Your Partner in Patient Safety

Installation Description

The KG111 is supplied only as part of a Kingsway Complete Door System or replacement. The door width must be properly sized to fit both hinge leaves between the hinge edge of the door and the rabbeted hinge jamb, while still only allowing 1/8" gap along the entire door strike edge to the frame's rabbeted strike jamb.

Operation and Maintenance

Operation

The stainless steel continuous hinge operates by an interlocking butt mechanism that provides a high strength and smooth motion for heavy, high-abuse single-acting doors.

Maintenance

Periodic checks should be made to ensure the hinge and screws have not been tampered with.

Cleaning

Cleaning of the hinge should be with a damp cloth. Cleaning agents should be avoided.

Guarantee

3 Year Guarantee*

*For faulty manufacture and not for damage

Specification


KG111 SECLUSION Single-Acting Continuous Hinge

Terms and conditions:

To see our full terms and conditions, please visit: kingswaygroupglobal.com/en-us/terms



ргодист diagram KG111 Continuous Hinge

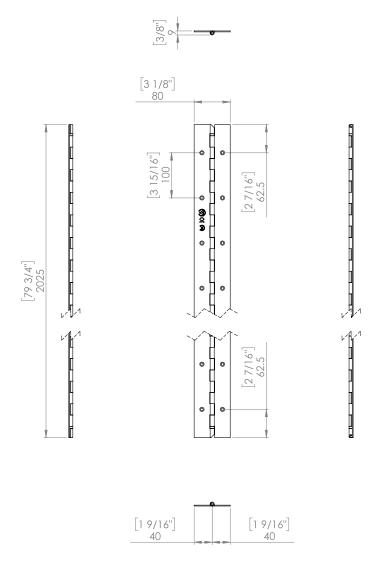

Terms and conditions:

To see our full terms and conditions, please visit: kingswaygroupglobal.com/en-us/terms