

KG255 Drop Rail



Product datasheet



The Kingsway Drop Rail is a sturdy hinged arm that can be locked in the upright position when not in use. Manufactured from heavy gauge steel for maximum strength and powder coated for extra comfort and for matching or contrasting to the surroundings.

Installation description

- Place the drop rail unit on the wall and mark for the screws.
- Drill holes for the screws and insert suitable plugs.
- Install the drop rail in place using the security screws provided.

Operation and Maintenance

Operation

To unlock the arm the 8mm square drive key is inserted and turned clockwise to 90°. To lock the arm back in its shroud, the arm is raised and positioned within the shroud. Then the key is turned through 90° which locks the arm in place.

Maintenance

Light lubricant can be used on moving parts and periodic checks should be made to hardware and the general operation of the arm.

Cleaning

Avoid the use of caustic cleaners and where necessary only a light detergent should be used.


Guarantee

5 Year Guarantee*

*Far faulty manufacture and not for damage

Architectural Specification

KG255 Anti-ligature Drop Rail Support.

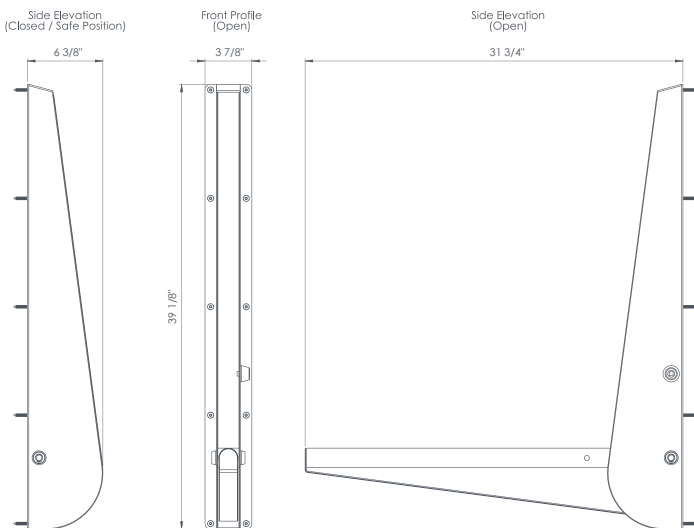

Anti-ligature Disclaimer

Anti-ligature Disclaimer The anti-ligature design characteristics of this product are not intended to replace or substitute the need for necessary supervision of those who may be at risk, or for other necessary protective measures to be taken in the specific circumstances of usage. Kingsway Group, Inc. does not offer any products for sale as being 'ligature-free' and will not be liable for any claims arising from ligature attachment on its products. It is the customer's responsibility to ensure that products purchased and installed are suitable for the environments they are installed in.