


**PRODUCT DATASHEET**

# KG360 Series Access Panels

The KG360 series of secure wall mounted ligature-resistant access panels allow for ease of access and operation while protecting against abuse and patient self-harm. Available in a range of sizes to meet your facility's requirements. Fitted with a Cam-Lock lockset and operated by a standard dispenser.



KG360 Exterior (8"x8") Sample shown does not require 3-Point Locking

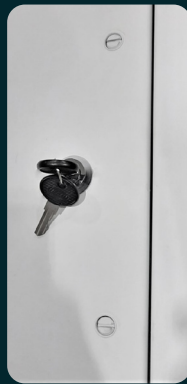

3-Point Locking System



3-Point Locking System (Internal, Concealed)



Infection Control Gasketing

**Terms and conditions:**

To see our full terms and conditions, please visit:  
[kingswaygroupglobal.com/en-us/terms](https://kingswaygroupglobal.com/en-us/terms)

## Installation Description

- Mark out the location of the access panel. Blocking is required to fit the Access Panel
- Cut out the opening using Cut Sheet
- Secure the access panel into the opening using the security fixings provided
- Secure outer flange with pick-resistant sealant

## Operation and Maintenance

### Operation

To open the access panel, unlock the latch on the face of the access panel, allowing the door to swing freely. To return to the locked position, push the panel back into the recess.

### Maintenance

Care should be taken to ensure that the lock remains functional and free from signs of damage.

### Cleaning

Use only a damp cloth to clean the access panel, where necessary a mild detergent can be used.

## Warranty

### 1 Year Manufacturer's Defect Warranty\*

\*For faulty manufacture and not for damage

### Specification

KG360-KG368 Ligature-Resistant Secure Access Panel. 14-Gauge Mild Steel, Primed white for painting on-site. Provided with lockset and seals pre-installed, security key & fixings. Size is nominal door size.

KG360 Access Panel 12" x 12"

KG362 Access Panel 14" x 14"

KG364 Access Panel 16" x 16"

KG366 Access Panel 18" x 18"


KG368 Access Panel 24" x 24"

## PRODUCT DIAGRAM

# KG360 Series Access Panels

Part Number	'A' Nominal Door	'B' Nominal Door	'C' Surface Flange	'D' Surface Flange	'E' Accessible Opening	'F' Accessible Opening	'G' Interior/ Mounting Flange	'H' Interior/ Mounting Flange
KG360	12"	12"	14"	14"	10 1/2"	11"	12 3/8"	12 1/4"
KG362	14"	14"	16"	16"	12 1/2"	13"	14 3/8"	14 1/4"
KG364	16"	16"	18"	18"	14 1/2"	15"	16 3/8"	16 1/4"
KG366	18"	18"	20"	20"	17"	17"	18 3/8"	18 1/4"
KG368	24"	24"	26"	26"	22 1/2"	23"	24 3/8"	24 1/4"

**Note: Prep in Framed/Blocked Wall or Ceiling  
Opening is nominal door size + 3/8" (9mm).  
Lockset and Cam Latches do not affect wall prep.**

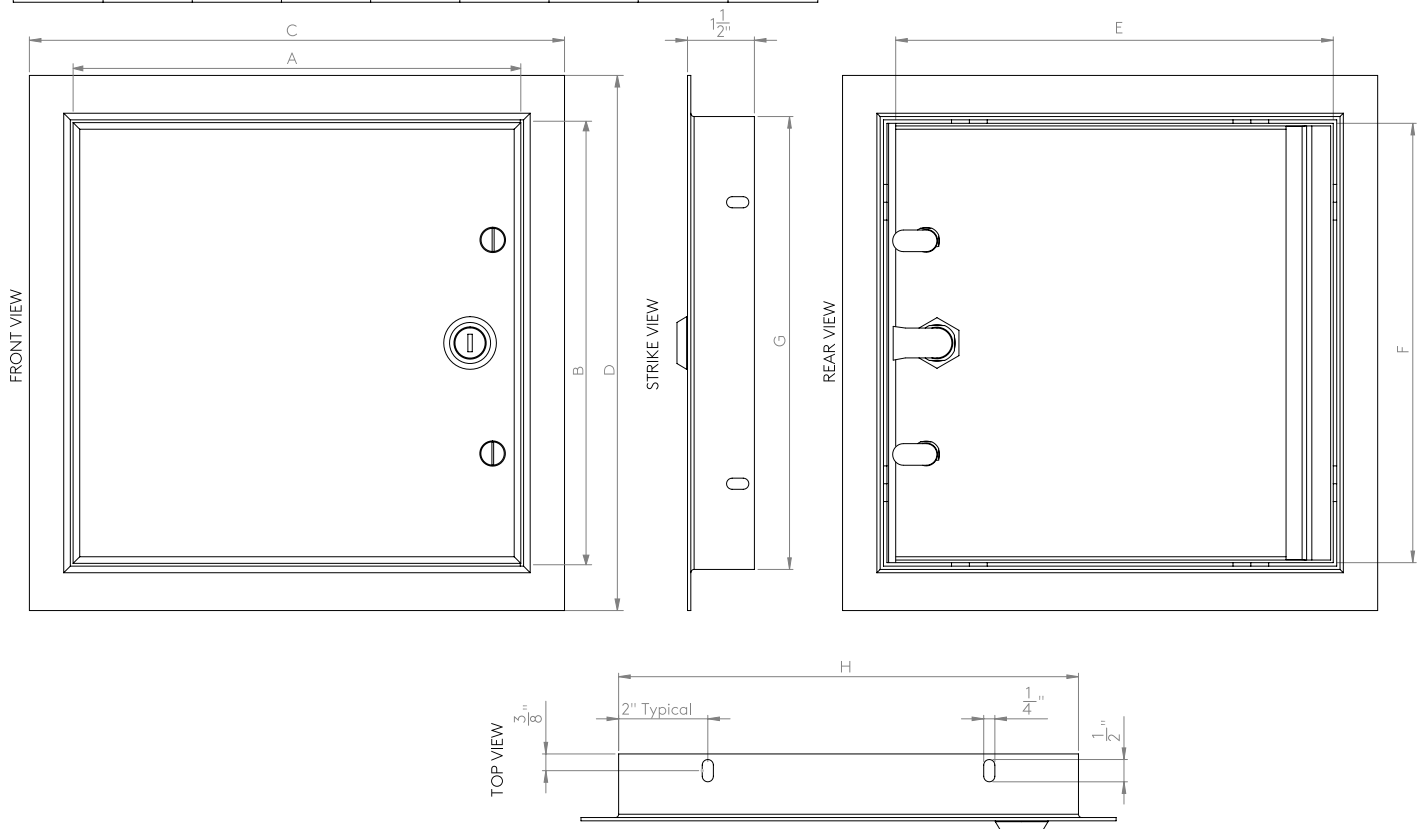

### Terms and conditions:

To see our full terms and conditions, please visit: [kingswaygroupglobal.com/en-us/terms](https://kingswaygroupglobal.com/en-us/terms)